

FARMER I



511 29 02



511 29 01
581 29 01



513 04 01
583 04 01



512 04 01
582 04 01

CE	⊕	IP54	E27	D
IP65 pro 511 29 02	G24d-3	Ta -25°C ÷ +40°C -40°C ÷ +60°C version „IF“		
VVG	Carton (mm/pcs):	1000 x 280 x 280 / 2 650 x 280 x 280 / 2		

Use: Light fitting for the illumination of indoor and outdoor industrial spaces.

Technical description:

The body is made of steel sheet and finished with powder paint. The inorganic glass cover with a seal and protective basket are fixed to the body with four metal caps. According to individual types, the light fitting includes: an ALSi terminal box, a steel pipe finished with powder paint or a galvanized steel sheet boom. The light fitting is made as a through light fitting and is provided with two cable outlets. The max. cross-section of the connecting conductors is 4 mm².

Installation:

On the ceiling, wall.

Versions:

Optional version of light fittings with reinforced corrosion protection – version „pz“, version with a protective steel basket – version „K“, version with a protective polycarbonate basket and stainless-steel caps – version „p“.

To order:



Glass cover
232.5068/1



Protective basket
182.5005 - PMMA
132.2540 - polycarb.




Protective steel
basket 1-99.6248



Metal cap
4-99.8470/01



Staninless metal
cap 4-99.6180/01

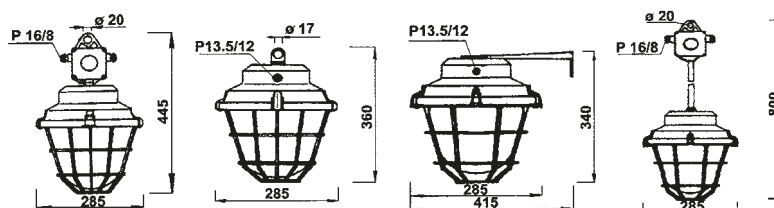

Type	Recommended light source [W]	Part of light fitting	Weight [kg]
511 29 01 (tF)	Bulb CLAS max. 200 **Halogen bulb EcoClassic max. 140 **Blended lamp HWL 160	Terminal box	4,2
511 29 02 (tF)		Holder	4,2
512 04 01 (tF)		Pipe and terminal box	4,2
513 04 01 (tF)		Boom	4,2
581 29 01	Compact fluorescent tube DULUX D 26	Terminal box	5,1
582 04 01		Pipe and terminal box	5,1
583 04 01		Boom	5,1

*By adding the letter „K“ after the type designation, the light fittings will be provided with protective baskets (511 29 01K).

** Types with limited surface temperature.

***By adding the letter „p“ after the type designation, the light fittings will be made with protective polycarbonate baskets and stainless-steel caps – for harsh conditions (511 29 01p).

****By adding the letters „pz“ after the type designation, the light fittings will be made with reinforced corrosion protection – for extra harsh conditions (511 29 01pz).

Any combinations of special versions at the customer's request.