

RAMINKO



Use:

Light fitting for the illumination of roads, parks, car parks, public areas as well as industrial spaces.


CE	230V 50Hz		IP43/23
E27	WVG 	Ta -25°C ÷ +30°C	
Carton (mm/pcs): 690 x 360 x 290 / 1			

Technical description: The light fitting body is made of prepreg. The optical cover is made of PMMA. The reflector is made of polished or anodized aluminium sheet. Electrical equipment with a 2 A fuse is fixed into the light fitting body. The max. cross-section of the connecting conductors is 2.5 mm².

Installation: On a column with a boom.

To order: clear cover 4-99.8105/1, boom 2-99.5581/1 or 3-99.10222 on the wall, boom 4-99.10230 on a concrete column, fastener 3-99.6026 on the column shank, fastener JET 60-60-90 on the column shank, wall holder MACH 60, boom UDS 300, UDS 500, UDS 1000, UDS 1500, UDS 2500, UDS 300R, UDS 500R, adapter 76 - 60.

Type	Recommended light source [W]	Weight [kg]
444 19 70	High-pressure sodium discharge lamp 70 High-pressure halide lamp 70	7.5
444 19 71	High-pressure mercury discharge lamp 80	7
444 19 72	High-pressure mercury discharge lamp 125	7.5

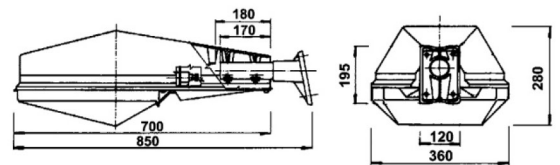

Type	Reflector 164.5004 chem. polished	Reflector 164.2540 anodized	Holder 2-99.5581	Seal 451.2674
444 19 70	+	-	+	+
444 19 71	+	-	+	+
444 19 72	+	-	+	+
444 19 70 A	-	+	+	+
444 19 70 C	+	-	-	-
444 19 71 C	+	-	-	-
444 19 72 C	+	-	-	-
444 19 70 D	-	+	-	-
444 19 71 D	-	+	-	-
444 19 72 D	-	+	-	-