


SPOT I



Use:

Light fitting for the illumination of sports facilities, car parks, ancient monuments, building facades, construction sites as well as industrial spaces.

CE	230V 50Hz		IP54
Ta -25°C ÷ +45°C pro 713 01 02 -25°C ÷ +30°C pro 743 01 02, 03			E40
Carton (mm/pcs): 630 x 630 x 580 / 1			

Technical description:

The light fitting body is an AlSi alloy casting finished with powder paint. The reflector is made of anodized, chemically polished aluminium sheet. The optical cover is made of hardened safety glass. To change the radiation pattern, the light source position is adjustable by means of a drawbar. The holder enables the turning of the floodlight in both the horizontal and vertical position. As a standard, the floodlight is supplied with a base-type holder (weld type to order). The max. cross-section of the connecting conductors is 2.5 mm².

Installation:


On the wall, pole or another solid substrate (structure) ensuring firm connection.

To order:

Rim with glass and silicone seal 2-99.7043/2 (for bulb sources), rim with glass and rubber seal 2-99.7043/1 (for discharge lamp sources), base-type holder 4-99.5526.

Type	Recommended light source [W]	Ballast box	Rim-seal-glass	Weight [kg]
713 01 02	Bulb SPC.A T CL 500 Blended lamp 500	-	silicon 2-99.7043/2	10
743 01 02	High-pressure mercury discharge lamp 400	1-99.5868	rubber 2-99.7043/1	10
743 01 03	High-pressure sodium discharge lamp 400 High-pressure halide lamp 400	1-99.5864 1-99.5871	rubber 2-99.7043/1	10

BALLAST BOX 7

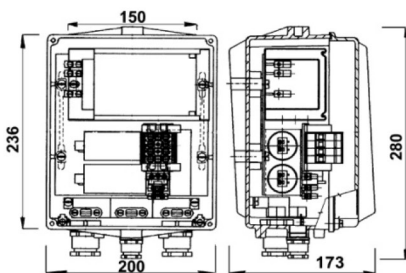

Use:

For the operation of discharge light fittings and floodlights such as the floodlight SPOT I.

CE	230V 50Hz		IP54
WVG 	Ta -25°C ÷ +35°C	E40	
Carton: 290 x 210 x 180 / 1			

Technical description: The body and cover are AlSi alloy castings finished with powder paint. Electrical equipment is installed inside. Two P21 outlets are designed for connecting cables, the P13.5 outlet serves for connecting the light fitting. The max. cross-section of the connecting conductors is 6 mm². The box is designed as a through box, for the terminal version it is provided with a seal washer. Can be mounted on the wall by means of M6 threads in the body or holder, type 438.2688/1.

Type	Recommended light source [W]	Weight [kg]
1-99.5864	High-pressure sodium discharge lamp 400	8.5
1-99.5865	High-pressure sodium discharge lamp 250	7
1-99.5866	High-pressure sodium discharge lamp 150	7
1-99.5867	High-pressure sodium discharge lamp 100	7
1-99.5868	High-pressure mercury discharge lamp 400	8.5
1-99.5871	High-pressure halide lamp 400	7