

# MULTIFREEZE LED




**USE** Light fitting for the illumination of indoor and outdoor industrial spaces.

**TECHNICAL DESCRIPTION** The light fitting body and flange are AlSi alloy castings finished with powder paint. There are two cable outlets M20 x 1,5 on the sides of the light fitting. There is a LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting. When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The light fitting is produced with plastic cable glands as a standard, metal cable glands are available on request

**INSTALLATION** On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**VERSIONS** Light fittings are made in versions for permanent (M) and non-permanent (NM) emergency illumination, with autonomy of 1 hours.

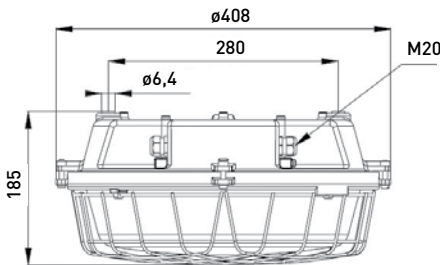

CE	LED	220 - 240V AC 190-245V DC
IP66	EMERGENCY	230V 50Hz
		Ta -30°C ÷ +50°C
Carton (mm/pcs) 400 x 400 x 190 / 1		

Type	Power input [W] /Luminous flux [lm]	Light source	Version	Autonomy [hr]	Weight [kg]
591 35 01 FEM	11 / 20	6 x LED	M/NM	1	8

## TO ORDER



Transparent glass cover  
232.5070



Protective basket  
1-99.8534/1



Cable gland plastic  
M20x1,5



Cable gland metal  
M20x1,5



Blinding plug  
M20x1,5