
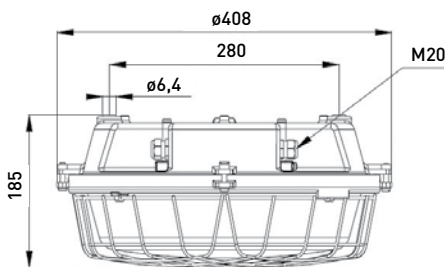


TURTLE LED PRO

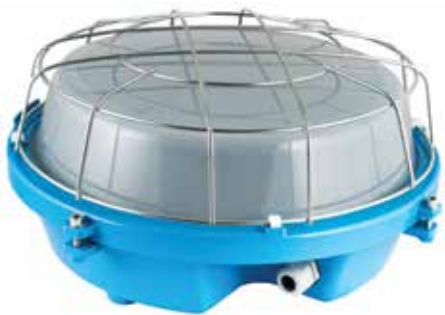

USE Light fitting for the illumination of indoor and outdoor industrial spaces.

TECHNICAL DESCRIPTION The light fitting body and flange are AlSi alloy castings finished with powder paint. There are two cable outlets on the sides of the light fitting. There is a LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting. When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 2.5 mm². The light fitting is produced with plastic cable gland as standard, metal gland is available on request.

INSTALLATION On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

VERSIONS The light fittings are provided with a self-resetting thermal fuse and a surge guard up to 10 kV. The emergency version of the light fittings for permanent (M) and non-permanent (NM) emergency illumination with autonomy of 1 hour.

LIFETIME 100.000 hours, L90B10

FUNKCE DRIVERU eCLO, ITG, IVG+, Power-up fading

CONTROL DALI-2

Type	Power input [W] / Luminous flux [lm]	Version	Autonomy [h]	Weight [kg]
591 35 01 PRO EM	55 / 6473	M / NM	1	8
591 35 02 PRO EM	35 / 4039	M / NM	1	8
591 35 03 PRO EM	25 / 2709	M / NM	1	8

CE	⊕	LED	EMERGENCY	198 – 264V AC 176-280V DC
IP66	F	Ta 591 35 01 for: -40°C ÷ +50°C 591 35 02 for: -40°C ÷ +55°C 591 35 03 for: -40°C ÷ +60°C		
Carton (mm/pcs) 400 x 400 x 190 / 1				

Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 35 01 PRO	50 / 6473	129	120	4000	>80	8
591 35 02 PRO	30 / 4039	135	120	4000	>80	8
591 35 03 PRO	20 / 2709	135	120	4000	>80	8

TO ORDER



Protective sand-blasted glass
232.5070



Protective basket
1-99.8534/1



Cable gland plastic
M20x1,5



Cable gland metal
M20x1,5



Blinding plug
M20x1,5

