








SUITABLE APPLICATIONS

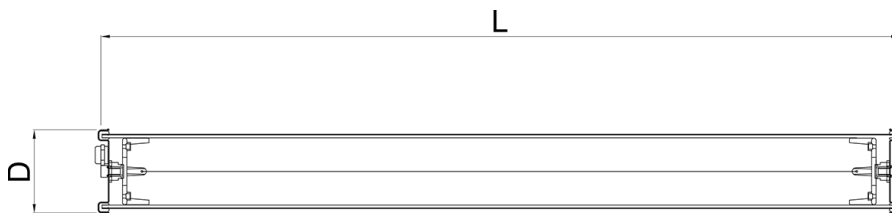




RG I	MACADAM 3/4	UGR <19	CR>80	L80B50 > 70.000	IK10	IP69K	CE EN 60598-1
------	----------------	------------	-------	-----------------------	------	-------	------------------



Ref.	Size (mm)	Power (W)	Gross output (Lm)	Net output (Lm)	T ^a colour (°K)	L (mm)	D (mm)	D+ clamp (mm)	Packaging
MU113	600	13	1.490	997	3.000	685	100	120	I
MU114	600	13	1.550	1.037	4.000	685	100	120	I
MU123	600	18	2.427	1.626	3.000	685	100	120	I
MU124	600	18	2.558	1.714	4.000	685	100	120	I
MU213	1200	24	2.980	1.993	3.000	1.300	100	120	I
MU214	1200	24	3.200	2.140	4.000	1.300	100	120	I
MU223	1200	36	4.854	3.252	3.000	1.300	100	120	I
MU224	1200	36	5.116	3.428	4.000	1.300	100	120	I
MU313	1500	29	3.720	2.488	3.000	1.600	100	120	I
MU314	1500	29	4.000	2.675	4.000	1.600	100	120	I
MU323	1500	45	6.067	4.065	3.000	1.600	100	120	I
MU324	1500	45	6.395	4285	4.000	1.600	100	120	I

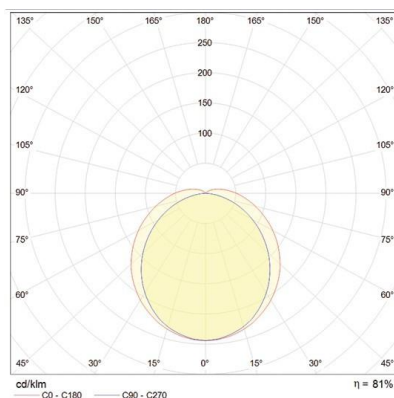



RG 0	MACADAM 3/4	UGR <19	CR>80	L80B50 > 70.000	IK10	IP69K	CE EN 60598-1
------	----------------	------------	-------	-----------------------	------	-------	------------------



MUSTANG ACCESORIES



Ref. Q0349

Steel cable suspension



Q0347

Stainless steel clamps



Q0338

Zinc-plated steel clamps



Q0110

Antivandal acrylic



Q0657

Stainless Steel 316 end caps



Ref. Q0348

Stainless steel clamps



Q0982

3 poles fast connector



Q0889

5 poles fast connector

CONTINUOUS LINE CONNECTION

3 poles Ref. Q0570

5 poles Ref. Q0571

DALI

EMERGENCY
1h/3h

Ref. Q0978

Pole adapter

